



Hall IC

PT3621B

General purpose Hall-effect Switch

Applications

- VCD/DVD loader, CD/DVD-Rom
- Cover detector
- Speed Measurement
- Home appliances
- Home safety

Features

- 2.5V to 18V operation
- Built-in dynamic offset cancellation
- Small size
- High balance and low thermal drift magnetic sensing


Order information

- PT3621B-LH /PKG:SOT23
- PT3621B-UA /PKG:TO92
- Temperature(T): K


Package Type

P/N: PT3621B-XX-X

TO92-3L (UA)



SOT23-3L (LH)



Specifications

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Conditions	Rating	Units
Maximum supply voltage	V_{DDmax}		18	V
Allowable power dissipation	P_D	TO-92(UA)	550 ^{*1}	mW
		SOT-23(LH)	300 ^{*1}	mW
Operating temperature	Ta		-40~+125	°C
Storage temperature	Ts		-55~+150	°C
Max. output current	I_{OMAX}		25	mA

*: On 50mm x 50mm x 1.6mm glass epoxy board

◆ All PROLIFIC products described or contained herein do not have specifications that can handle applications require extremely high levels of reliability, such as life-support systems, aircraft control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your PROLIFIC representative nearest you before using any PROLIFIC products described or contained herein in such applications.

◆ PROLIFIC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, the rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all PROLIFIC products described or contained herein.

PROLIFIC TECHNOLOGY INC.

7F, No.48,Sec.3, Nan Kang Rd., Nan Kang, Taipei, 115, Taiwan.

Electrical Characteristics ($T_A=+25^{\circ}\text{C}$, $V_{DD}=12\text{V}$)


Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Units
Supply Voltage	V_{DD}		2.5		18	V
Output Sink Voltage	$V_{DS(ON)}$	@ $I_{OUT}=20\text{mA}$		0.3	0.5	V
Output Breakdown Voltage	V_{BV}			22	30	V
Supply Current	I_{DD}	Output open		6	10	mA

Magnetic Characteristics ($T_A=+25^{\circ}\text{C}$, $V_{DD}=12\text{V}$)

Operate Point	B_{OP}		-120	-105	-90	G
Release Point	B_{RP}		-110	-85	-55	G
Hysteresis	B_{HYS}		-35	-20	-10	G

Output Behavior versus Polarity ($T_A=-40^{\circ}\text{C}\sim 125^{\circ}\text{C}$, $V_{DD}=2.5\text{V}\sim 18\text{V}$)

Parameters	Test Conditions(LH)	Output(LH)	Test Conditions(UA)	Output(UA)
South pole	$B < B_{rp}$	High	$B > B_{op}$	Low
North pole	$B > B_{op}$	Low	$B < B_{rp}$	High

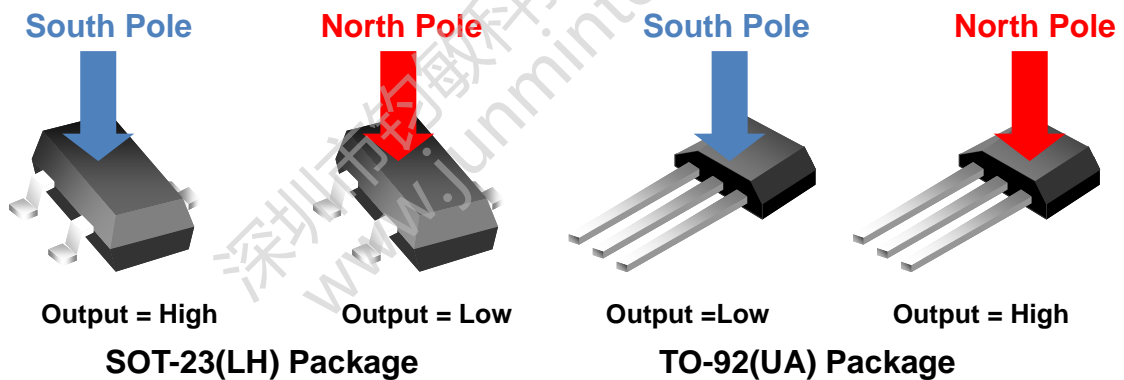

General Specifications

The PT3621B is designed for magnetic actuating using a unipolar magnetic field. The built-in dynamic offset cancellation of pre-amplifier stage achieves optimal symmetrical magnetic sensing. The supply voltage range is from 2.5V to 18V and the maximum output current is 25mA.

This Hall effect sensor IC integrate the sensor, pre-amplifier with dynamic offset cancellation and the hysteresis comparator in single chip. The architecture block diagram is shown in Fig. 1.





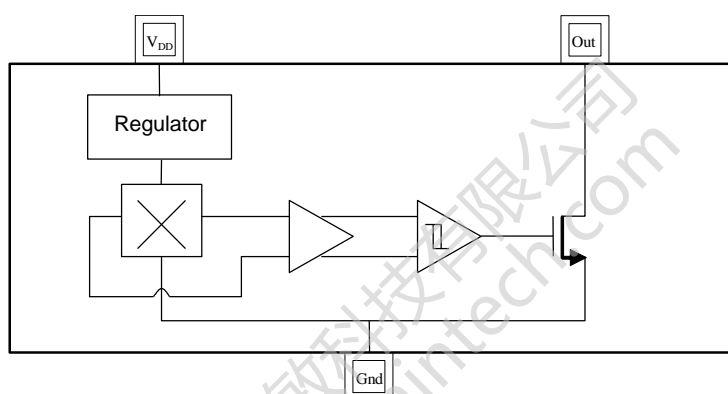


Fig. 1. Functional diagram


Magnetic Flux Density in Gauss

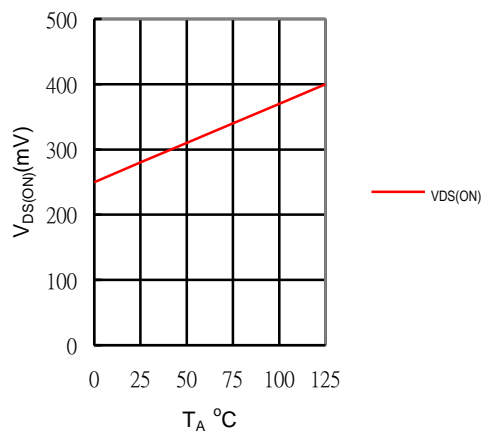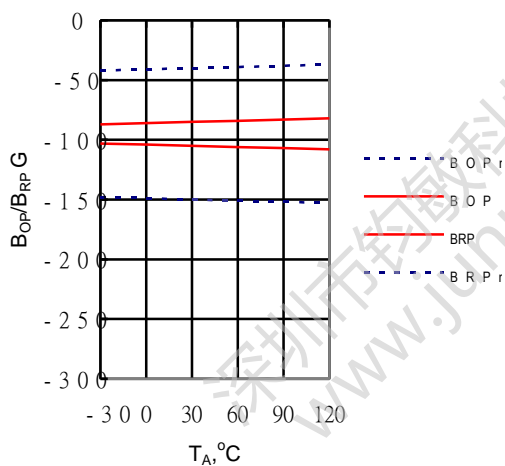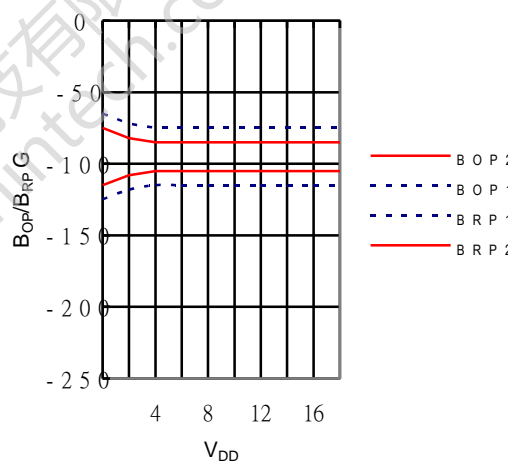

Output sink voltage versus temperature


 B_{OP} , B_{RP} versus temperature

 B_{OP} , B_{RP} versus supply voltage

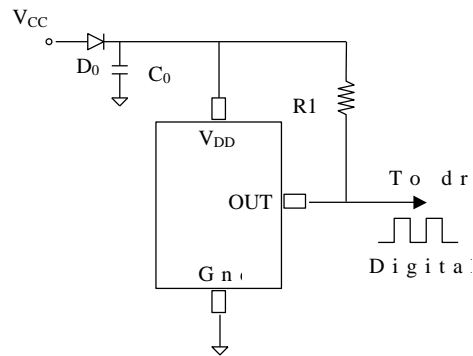
Application circuits



NOTE :


D_0 : general diode

C_0 : decoupling capacitor 1 μ F(recommended)

R_1 : 1K~10Kohm (recommended)

Package Outline

TO-92(UA)

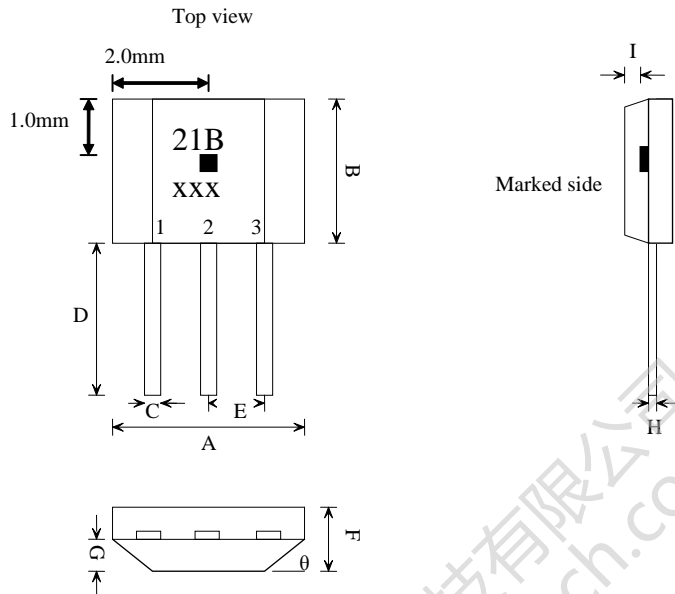

Marking:


Part Number : 21B Temperature code : x
Date Code : x(Year) xx(Week)

1. VDD/DC power supply
2. GND/DC ground
3. OUT/output pin

SYMBOLS	DIMENSIONS IN MILLIMETERS(mm)		
	MIN	NOM	MAX
A	3.80	4.00	4.20
B	2.90	3.10	3.30
C	0.38	0.45	0.52
D	15.10	15.30	15.50
E	1.24	1.27	1.30
F	1.45	1.50	1.55
G	0.68	0.73	0.78
H	0.36	0.43	0.50
I	0.41	0.43	0.45
θ		45°	

Package Outline SOT-23(LH)

Sensor Location

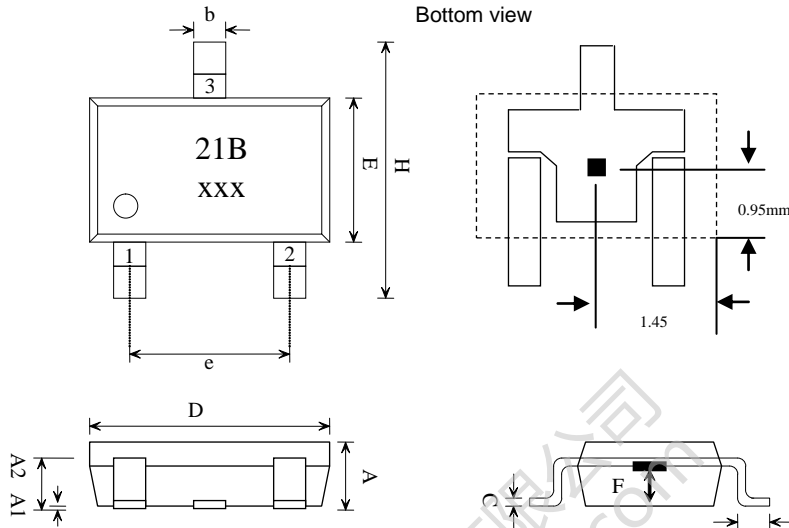

Marking:

Part Number : 21B Temperature code : x
Date Code : x(Year) xx(Week)


1. VDD/DC power supply
2. OUT/output pin
3. GND/DC ground

SYMBOLS	DIMENSIONS IN MILLIMETERS(mm)		
	MIN	NOM	MAX
A	1.00	1.10	1.30
A1	0.00	-	0.10
A2	0.70	0.80	0.90
b	0.35	0.40	0.50
C	0.10	0.15	0.25
D	2.70	2.90	3.10
E	1.40	1.80	2.00
F	0.35	0.50	0.65
H	2.60	2.8	3.00
e	1.7	1.9	2.1
L	0.20	-	-

TO-92(UA) packing specification

1. Reference document: PD-3-75-010

2. Dimension:

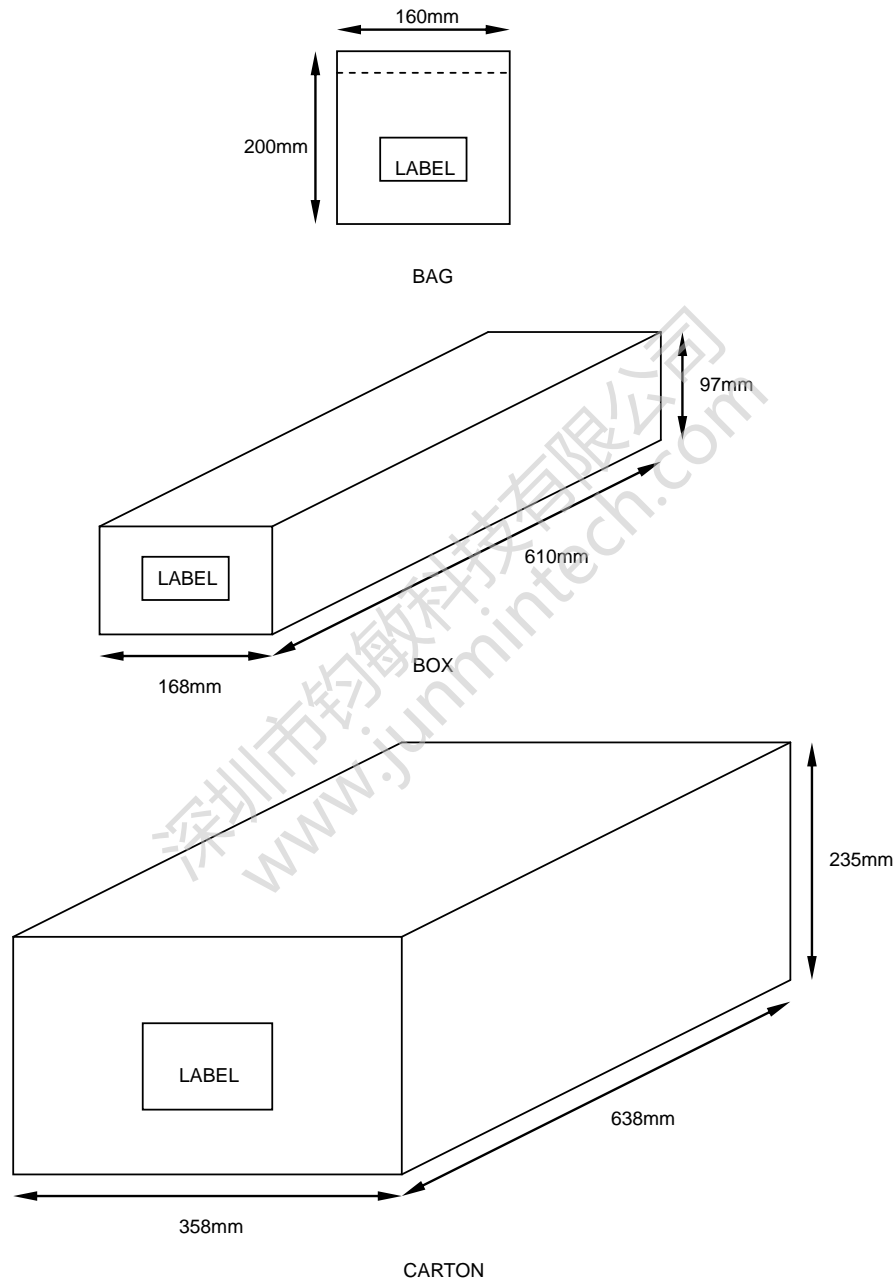

3. Quantity:

1BAG=1000EA


1BOX=20BAGS

1CARTON=4BOXES


SOT-23(LH) packing specification

1. Reference document: PD-3-75-010


2. Dimension:



BAG

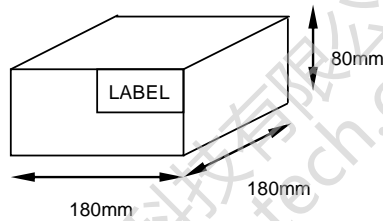

BOX

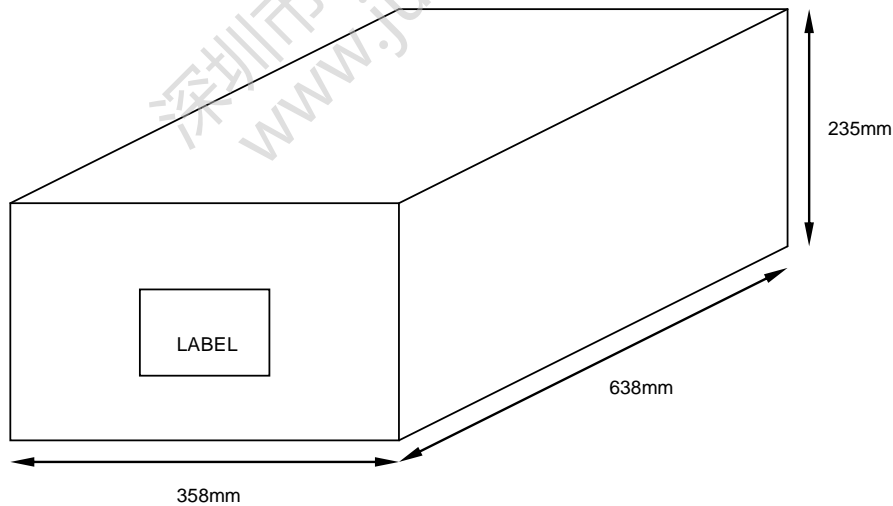

CARTON

3. Quantity:

1REEL=3000EA

1BOX=5 REELS

1CARTON=14BOXES

Order information

Part Number	Temperature Range	Package Type	Package Qty
PT3621B-UAK	-40°C~+125°C	TO92-3L	1000pcs/Bulk
PT3621B-LHK	-40°C~+125°C	SOT23-3L	3000pcs/Reel

- ◆ Specifications of any and all PROLIFIC products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- ◆ PROLIFIC Technology Inc. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- ◆ In the event that any and all PROLIFIC products described or contained herein fall under strategic products (including services) controlled under the Foreign Exchange and Foreign Trade Control Law of Taiwan, such products must not be exported with our obtaining export license from the Ministry of international Trade and Industry in accordance with the above law.
- ◆ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of PROLIFIC Technology Inc.
- ◆ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the Delivery Specification for the PROLIFIC product that you intend to use.
- ◆ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. PROLIFIC believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Specifications and information herein are subject to change without notice.